

TNKMAN® Distribution Blocks




The TNKMAN® distribution block provides an alternative to hosing self-contained nitrogen gas springs to each other. It eliminates as many fittings as possible, including all elbow and tee fittings, often sources of leaks.

TNKMAN Features

- Gas springs can be connected outside the die.
- Two end ports can be used for additional gas springs or connection of a control panel and/or pressure monitor.
- Complete set of plugs included for ports not in use.
- Complete set of straight fittings included.
- Six basic models with a variety of adapter options.

TNKMAN® Distribution Blocks

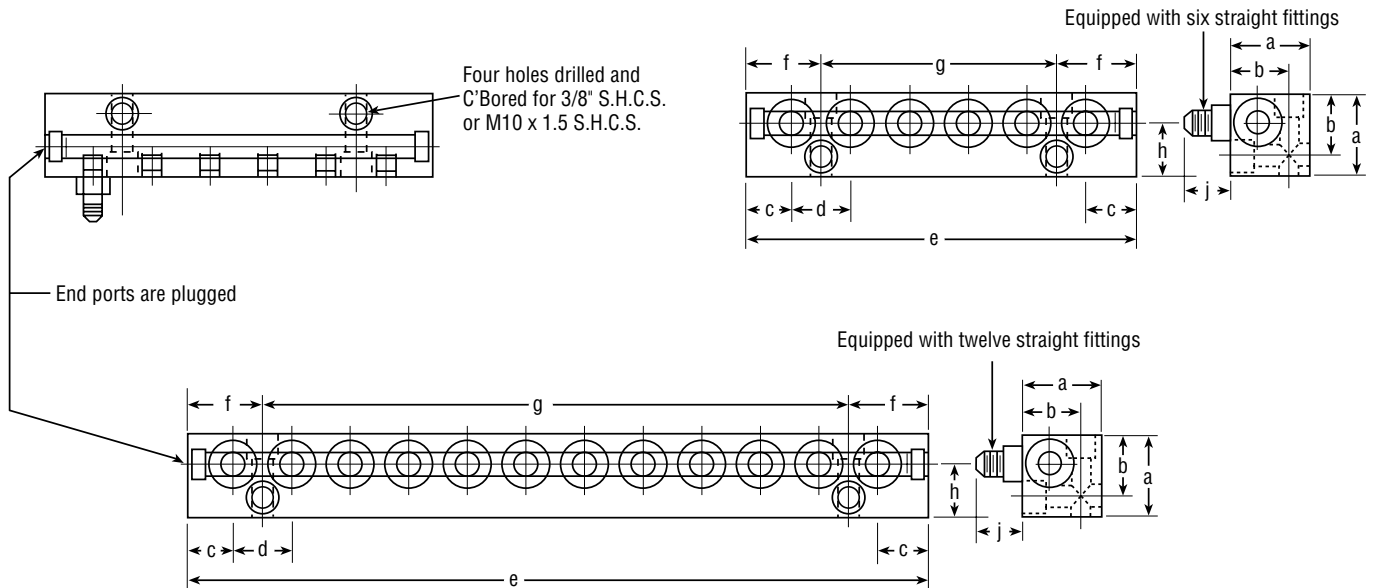

Dimensional Information

Part Number		a	b	c	d	e	f	g	h	j
TNKMAN-6	mm	38	29	22	29	187	37	114	25	22
	in	1.50	1.14	0.87	1.14	7.36	1.46	4.49	0.98	0.87
TNKMAN-12	mm	38	29	22	29	359	37	286	25	22
	in	1.50	1.14	0.87	1.14	14.13	1.46	11.26	0.98	0.87
TNKMAN-6 OR	mm	38	29	22	29	187	37	114	25	18
	in	1.50	1.14	0.87	1.14	7.36	1.46	4.49	0.98	0.71
TNKMAN-12 OR	mm	38	29	22	29	359	37	286	25	18
	in	1.50	1.14	0.87	1.14	14.13	1.46	11.26	0.98	0.71
TNKMAN-6 EZ-M8	mm	38	29	22	29	187	37	114	25	22
	in	1.50	1.14	0.87	1.14	7.36	1.46	4.49	0.98	0.87
TNKMAN-12 EZ-M8	mm	38	29	22	29	359	37	286	25	22
	in	1.50	1.14	0.87	1.14	14.13	1.46	11.26	0.98	0.87

Ordering Options

TNKMAN-6

Model*

TNKMAN-6
TNKMAN-12

OR

Fitting Type

OR
G1/8
G1/8 OR
G1/8EZ
EZ-M8

*JIC fittings standard. M10 fasteners available on request.

HYSON

10367 Brecksville Road, Brecksville, Ohio 44141
Toll Free: 1-800-876-4976 • Tel: 440-526-5900 • FAX: 440-526-6807
E-mail: hyson@asbg.com • www.hysonproducts.com